





THE R.J.
MARSHALL
COMPANY

**Fiber Blends &
Compounds**
~Since 1980~

Aramid



Polyethylene

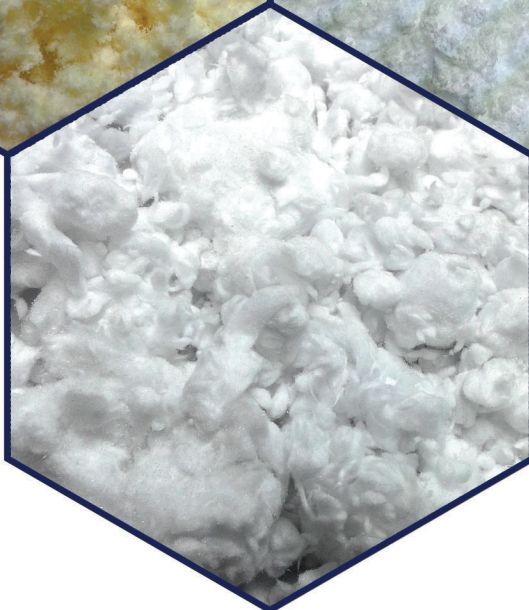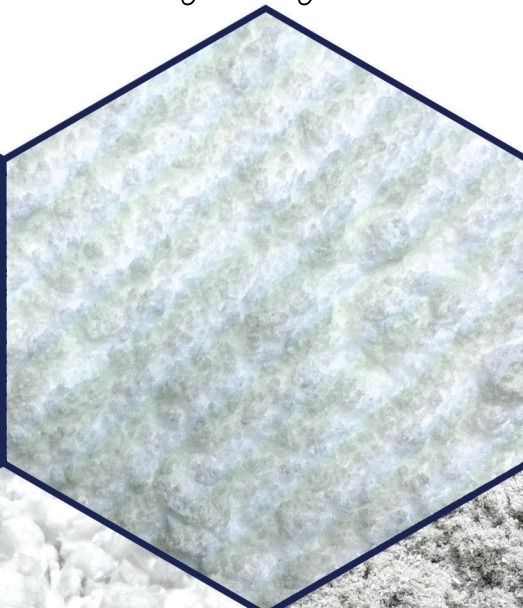

Glass



Cellulose

Expanded Blends and Compounds

- Lower raw material cost
- High reinforcement strength (*High tensile*)
- Improved viscosity control (*Slump resistance*)
- Rapid dispersibility (*Lower processing costs*)
- Excellent chemical resistance

ARAMID (AR)	DESCRIPTION	APPLICATIONS
AR990	Aramid / Talc	High tensile thermoset, High tensile asphalt & elastomeric roof coatings, mastics, & adhesives
AR59CB	Aramid / Carbonate	Sealants
AR36IA	100% expanded aramid	Fire break compounds
POLYETHYLENE (PE)		
PE210, PE230, PE250 PE270, PE290 PE2000, PE254SL	Polyethylene / Talc	Asphalt & Elastomeric
PE24JA, PE26JA	100% polyethylene pulp	Roof coatings, sealants, mastics, caulks, crack resistant stuccos & plasters
KAYOCEL (KA)		
KA1690, KA650	Secondary cellulose / Calcium carbonate	Asphalt roof coatings, mastics, friction brakes, clutches & gaskets
16W100, 6W100 16W90, 6W50	Primary cellulose	Acoustical / textured paints
SPECIALTY BLENDS		
105MA	Polyethylene / Glass	"Non-balling" tire sealant
APC/54JA	Proprietary	Glass atomized protective coat
FH80, FH200, 9KA	Hardwood fiber	Glass partitioning agents




THE R.J.
MARSHALL
COMPANY

FIBER FACTS

ARAMID - Poly-para-phenylene terephthalamide

One of the strongest synthetic reinforcing fibers known.

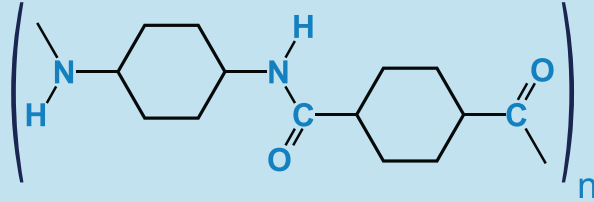

ARAMID STAPLE FIBER - Aramid yarn or chopped yarn. (needle like structure)


ARAMID PULP - Highly fibrillated Aramid fiber

EXPANDED ARAMID PULP - An Aramid pulp that has been processed to impart greatest surface area thus maximizing physical properties and ease of dispersibility.

FIBER BLENDS - A blend of two or more fibers or fibers and pulps.

FIBER COMPOUNDS - A mixture of a pulp and non-fibrous functional or non-functional (filler) material.

POLYETHYLENE - $(C_2H_4)_n$, a linear hydrocarbon, has a density of 0.91-0.96 g/cc, a melting point of 115-135°C, and is known for high chemical resistance and inertness. The pulp is highly fibrillated and an excellent reinforcing fiber.

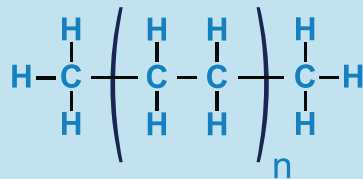

PRIMARY CELLULOSE - A bleached and purified natural wood or cotton derived polysaccharide, having a density of 1.5g/cc, and used to manufacture of paper and food products. Cellulose have relatively high water and oil absorption. Cellulose decomposes at 260-270°C.

SECONDARY CELLULOSE PULP - A cellulose from reclaimed news and magazine stock.

To discuss your specific requirements, sample inquiries,
or to place an order, we encourage you to contact us at:

The R.J. Marshall Company
26776 West 12 Mile Road
Southfield, Michigan USA 48034
Telephone: 800-338-7900
Customer Care: 888-514-8600
Fax: 877-717-5577

Email: salesinfo@rjmarshall.com

For more information, visit our website:

www.Rjmarshall.com



THE R.J.
MARSHALL
COMPANY

NOTE: All statements, technical information and recommendations are based on tests we believe to be reliable. The accuracy or completeness is not guaranteed. The following is made in place of all warranties, expressed or implied. Our only obligation is to replace product proven to be defective. We shall not be liable for injury, loss or damage, direct or indirect, from using or not being able to use the product. Before using, customer must determine the suitability of the product for the intended use and customer assumes the responsibility.

October 2020